

TYPICAL SLAB NOTE:  
 5" THICK CONCRETE SLAB REINFORCED W/#4 @ 15" O.C.  
 E.W. OVER 12" (MIN.) PREPARED SUBGRADE MATERIAL.  
 REINFORCING SHALL BE CHAIRED TO MAINTAIN THE  
 REINFORCING AT ONE THIRD THE DEPTH BELOW THE  
 TOP SURFACE DURING CONCRETE PLACEMENT.  
 RE: GEOTECHNICAL REPORT.

NOTE:  
 A MINIMUM OF 12" OF EXISTING FAT CLAY SHALL BE  
 REMOVED AND REPLACED WITH SELECT FILL OR MOISTURE  
 CONDITIONED EXISTING MATERIAL IN ACCORDANCE WITH  
 GEOTECHNICAL RECOMMENDATIONS.  
 RE: GEOTECHNICAL REPORT.

FINISH FLOOR ELEVATION = 0'-0"  
 RE: CIVIL FOR ACTUAL ELEV.

ISSUE/REVISION  
 ISSUE FOR PERMIT & PRICING



DATE  
 06/13/2018

NO.

WWW.BIGREDDOG.COM

TEXAS REG. NO. F-11201

832.431.4560

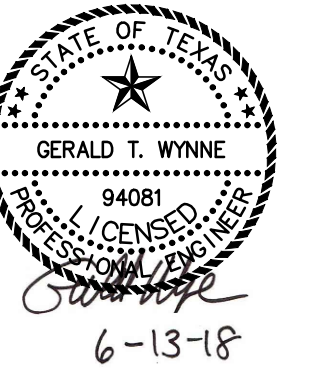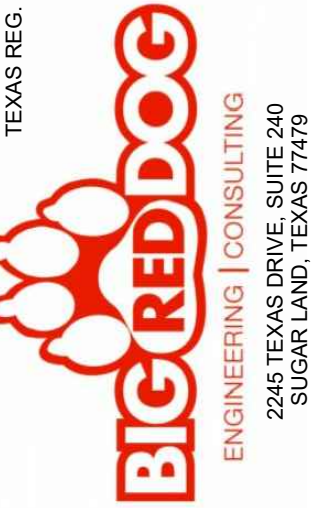

PROJECT:  
 17211 PAD SITE  
 17211 145 SOUTH - Houston, TX 77090

SHEET TITLE:  
 Foundation Plan

S100

SCALE: 1/8" = 1'-0"